


ADJUST CASTING TO $\frac{1}{8}$ " - $\frac{1}{4}$ "
BELOW FINISHED GRADE, TYPICAL
FOR ALL CASTINGS IN PAVEMENT

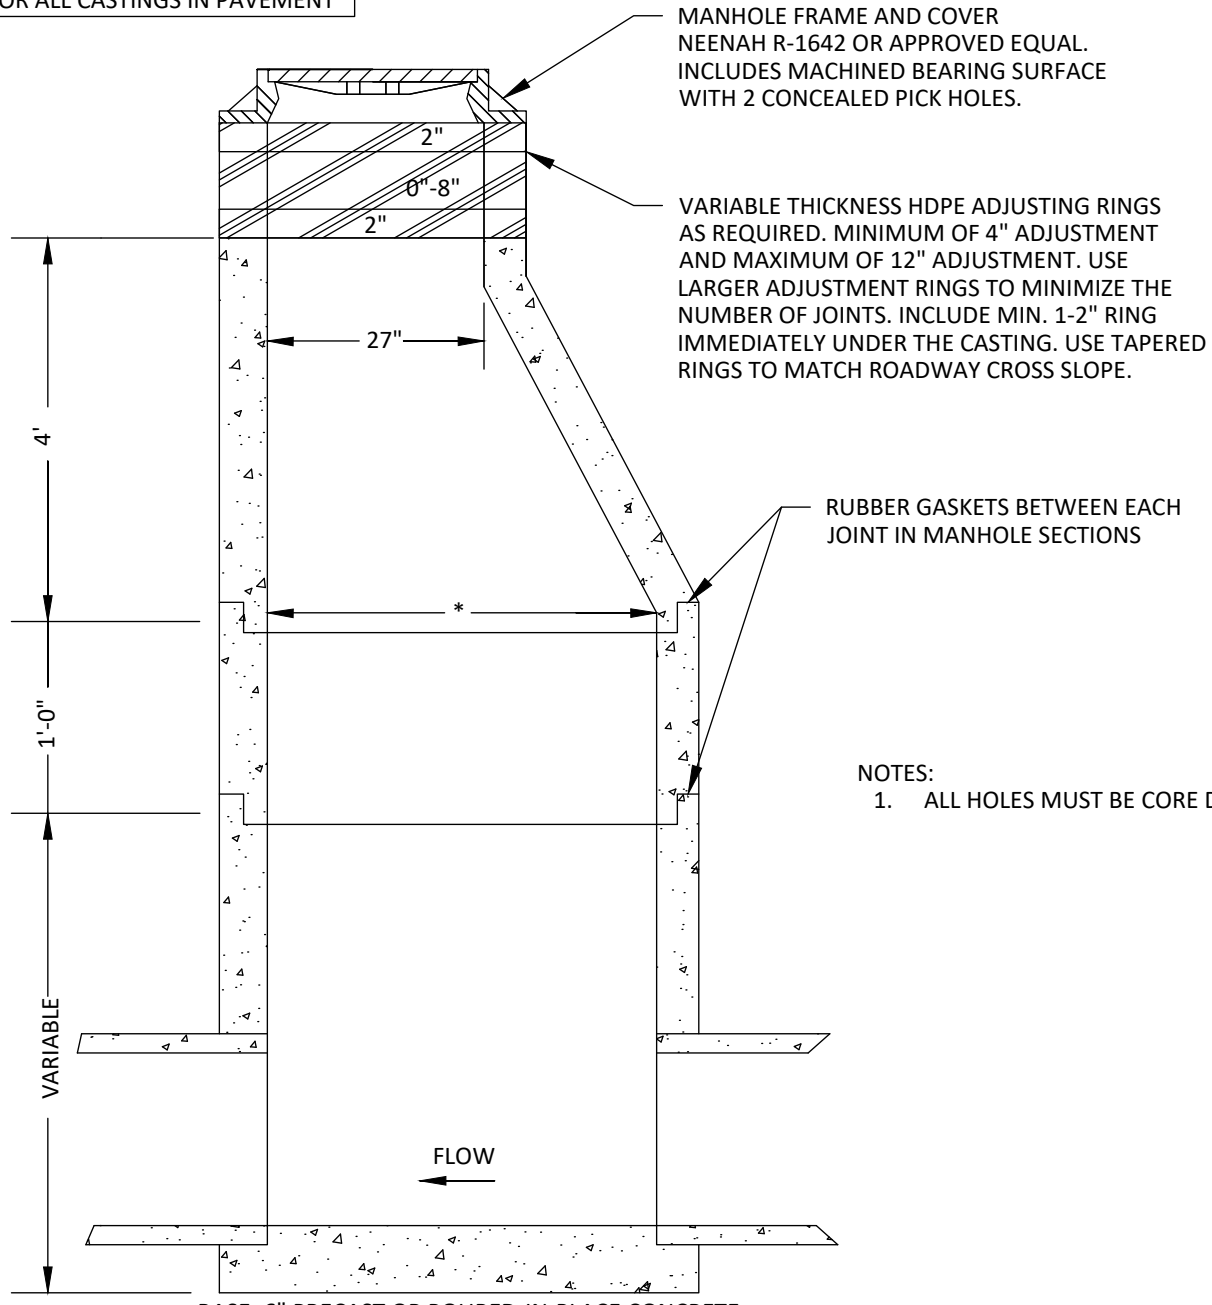

MANHOLE FRAME AND COVER
NEENAH R-1642 OR APPROVED EQUAL.
INCLUDES MACHINED BEARING SURFACE
WITH 2 CONCEALED PICK HOLES.

VARIABLE THICKNESS HDPE ADJUSTING RINGS
AS REQUIRED. MINIMUM OF 4" ADJUSTMENT
AND MAXIMUM OF 12" ADJUSTMENT. USE
LARGER ADJUSTMENT RINGS TO MINIMIZE THE
NUMBER OF JOINTS. INCLUDE MIN. 1-2" RING
IMMEDIATELY UNDER THE CASTING. USE TAPERED
RINGS TO MATCH ROADWAY CROSS SLOPE.

RUBBER GASKETS BETWEEN EACH
JOINT IN MANHOLE SECTIONS

NOTES:
1. ALL HOLES MUST BE CORE DRILLED

BASE: 6" PRECAST OR POURED-IN-PLACE CONCRETE

