

NEENAH CASTING 3067-V  
OR APPROVED EQUAL

MINIMUM OF 2, MAXIMUM OF 5 HDPE  
ADJUSTING RINGS. USE LARGER ADJUSTMENT  
RINGS TO MINIMIZE THE NUMBER OF JOINTS.  
USE TAPERED RINGS TO MATCH STREET  
CROSS SLOPE.

2" CONCRETE COLLAR AROUND RINGS


6" PRECAST REINFORCED  
CONCRETE SLAB W/ 24"X36"  
SLAB OPENING

RUBBER GASKETS BETWEEN ALL  
PRECAST MANHOLE SECTIONS

DOGHOUSES SHALL BE GROUTED ON BOTH  
INSIDE AND OUTSIDE.

5" MINIMUM

CONCRETE CONE TO BE POURED  
AT BOTTOM OF SLAB.

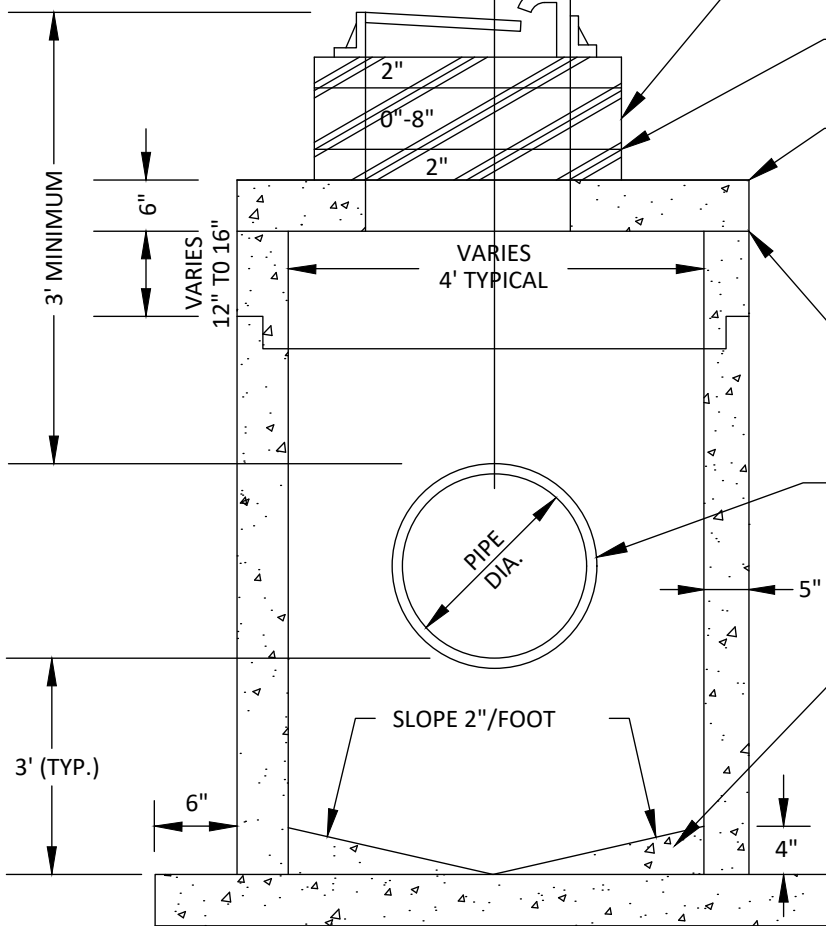

BASE: 6" PRECAST OR POURED-IN-PLACE CONCRETE



# CATCH BASIN MANHOLE WITH SUMP

PLATE NO.

## STM-03

REVISED 01/25